




Sunsail 32i

2 CABIN / 1 HEAD

Yacht Specification

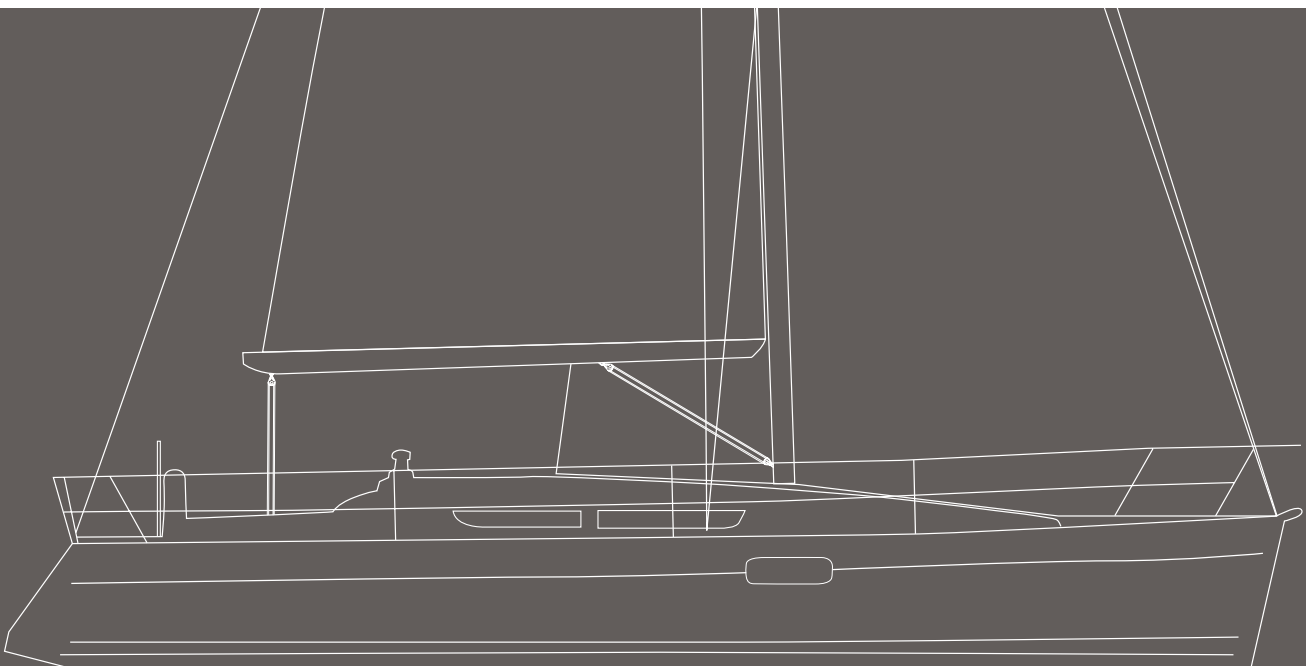

Sunsail 32i

HULL & DECK

Prisma Process® injected deck, ISO gelcoat surface, discontinuous balsa block coring

Solid, hand-laid fibreglass, ISO gelcoat surface, protective barrier coat

Inner fibreglass grid, high-load zones cut out, drainage system through structure

Stainless steel bow pulpit, navigation lights and integrated wiring for lights

Stainless steel stern pulpits with buoy bracket

Double level of stainless steel lifelines with PVC coating, stainless steel stanchions

Aluminium toerail profile with 4 integrated chocks and drainage for side deck

4 x aluminium mooring cleats forward and aft

Handrails on coachroof for secure movement forward

Fixed hull ports x 2 in saloon with curtains

Fixed windows along coachroof with integrated opening ports and curtains

3 x opening cockpit and roof ports with curtains

Opening cockpit port into aft cabin

Opening deck hatch in saloon forward-facing with curtains

Opening deck hatch in forward cabin forward-facing with curtain

Sunsail striping and graphics

Outboard bracket on stern line

ENGINE & STEERING SYSTEM

Yanmar 20HP with heat exchanger, latest generation of environmentally friendly engines

Fully soundproofed engine compartment with engine access behind stairwell and from aft cabin

Stainless steel propeller shaft 25mm diameter and maintenance free stuffing box

Fuel/water separator

Rotomolded fuel tank located under aft berth with deck fill

Built-in muffler, air ventilation and stainless steel exhaust fitting aft

Fixed 2-blade bronze propeller

Bulkhead-mounted compass

Throttle and engine control panel, warning lights, ignition protected by a plexiglass panel

Bimini

Sprayhood

MOORING & ANCHORING

Primary anchor and all chain rode

Secondary anchor with chain and rope

Electric windlass Quick 1000W combination rope and chain, vertical mounted in the anchor locker, handheld remote

Single anchor roller

Anchor locker forward, room for anchor and tackle

Anchor and steaming light

COCKPIT

Fixed cockpit table

Cockpit bench seating

1 large cockpit locker to starboard under bench seat with integrated gas locker

Steering wheel mounted on steering pedestal with grabrail and instrumentation

Folding transom seat for easy access to the transom

Transom rubrail

Stainless steel folding swim ladder mounted on transom step

Cockpit shower

MAST & RIGGING

Classic mast aluminium with single spreaders, deck-stepped

Standing rigging discontinuous 1x19 stainless steel wire

Backstay fixed

Genoa furler with attachment to stemhead fitting and furling line lead aft to roof winch

Topping lift, mainsail halyard, genoa halyard, mainsheet, genoa sheets

Boom vang block and tackle system

SAILS

Heavy duty charter spec fully battened mainsail

Heavy duty charter spec furling genoa with UV protection strips

Heavy duty chart spec lazyjacks and stackpack system

2 x Harken 32.2 self-tailing genoa winches

1 x Harken 16.1 self-tailing coachroof winch

Genoa tracks: adjustable lead cars

Harken turning blocks for genoa sheets

2 x winch handles with ball-bearing grip

Spinlock line jammers on coachroof

Mainsheet attached to padeyes forward of companionway hatch with sheet lead back to cockpit winch

ELECTRICAL SYSTEM

12 v alternator output (55A)

25AMP Battery charger

Charge distributor/isolator

Separate engine start and domestic AGM (Absorbed Glass Matt) batteries system

Battery switches for engine bank, positive battery switch for domestic bank and negative general cut-off switch

Flush mounted chromed brass ceiling lights in saloon and cabins

Wall mounted lights in saloon and reading lights in cabins

Autopilot

Electronic depth and speed reading SOG from the GPS

Electronic wind speed and direction

Chart plotter with GPS

VHF at chart table with masthead antenna

Remote speaker for VHF in cockpit Stereo/CD with socket for MP3 with saloon speakers

Cockpit speakers for stereo

110v or 220v shore power with sockets and water heater

WATER SYSTEM

Pressurised water distributed through-out the boat via semi-rigid hose

“Heavy-duty” water pump and accumulator tank for consistent water pressure

20 litre hot water tank that is connected to engine heat exchanger.

Manual bilge pump in the cockpit

Chromed shower faucets in washrooms

Shower sumps equipped with individual electric pumps with filters and on-off switches

Manual pump marine toilet

50L Rotomolded holding tank located in head compartment with valve for overboard discharge via gravity and deck fitting for pump out

SALOON

Saloon with seating, cushions and storage under seating area

Folding saloon table with fiddles

Bottle storage compartment in table

Laminate floorboards with light-coloured lines and sealed edges throughout interior

Wood hull lining

Upper storage cabinets

Companionway with 4 varnished wood steps

Headroom: 1.84m / 6ft 1in

Fan in saloon and galley

GALLEY

Headroom: 1.82m / 5ft 11in.

Galley with laminated countertops, chrome plumbing fittings, storage cabinets and drawers

Laminated panels with solid wood trim around galley, companionway and cabinetry, finished in satin UV stabilised varnish

U-shaped galley to starboard with round stainless steel sink

Stainless steel grabrail in galley

12v compressor under stove with evaporator plate located in fridge compartment

2 burner stove with oven & grill

12V fridge compartment with verticle access (140L capacity)

NAVIGATION STATION

Full-featured electrical panel with spare breakers, voltmeter and 12v plug

Aft-facing nav station, seating on starboard bench seat

Navigation desk with storage

Gooseneck chart light mounted at nav station

HEAD

Accessible from saloon

Sink, storage cabinet, clothes hook, towel holder, toilet paper holder

Shower sump with electric drainage pump

COMPANIONWAY

Headroom: 1.86m / 6ft 1in.

FORECABIN

Headroom: 1.86m / 6ft 1in.

Double V berth with high-density foam mattress: 2.03m x 1.60m (6ft 8in x 5ft 3in)

Storage locker under berth

Cabinet with hanging rod

Wide, bi-fold door for easy access

Vinyl lining on hull with lateral wood shelf

Fan in forward cabin

AFT CABINS

Headroom : 1.81m / 5ft 11in.

Double berth with high-density foam mattress: 2.05m x 1.85m (6ft 9in x 6ft 1in)

Deep cabinet with shelves and hanging rod

Vinyl lining on hull with lateral wood shelf

Fan in aft cabin

ADDITIONAL CRUISING GEAR


Above-deck equipment.

Bedding, linens and galley equipment.

Safety equipment.

Sunsail 32i

The new Sunsail 32i is built by Jeanneau and features a surprisingly spacious two-cabin layout. She is equipped with the best hardware and a voluminous interior making the perfect balance between the fast designed hull and the exceptional comfort of this two-cabin yacht. This yacht will suit any level of sailor enabling them to enjoy their new yacht with their friends and family.

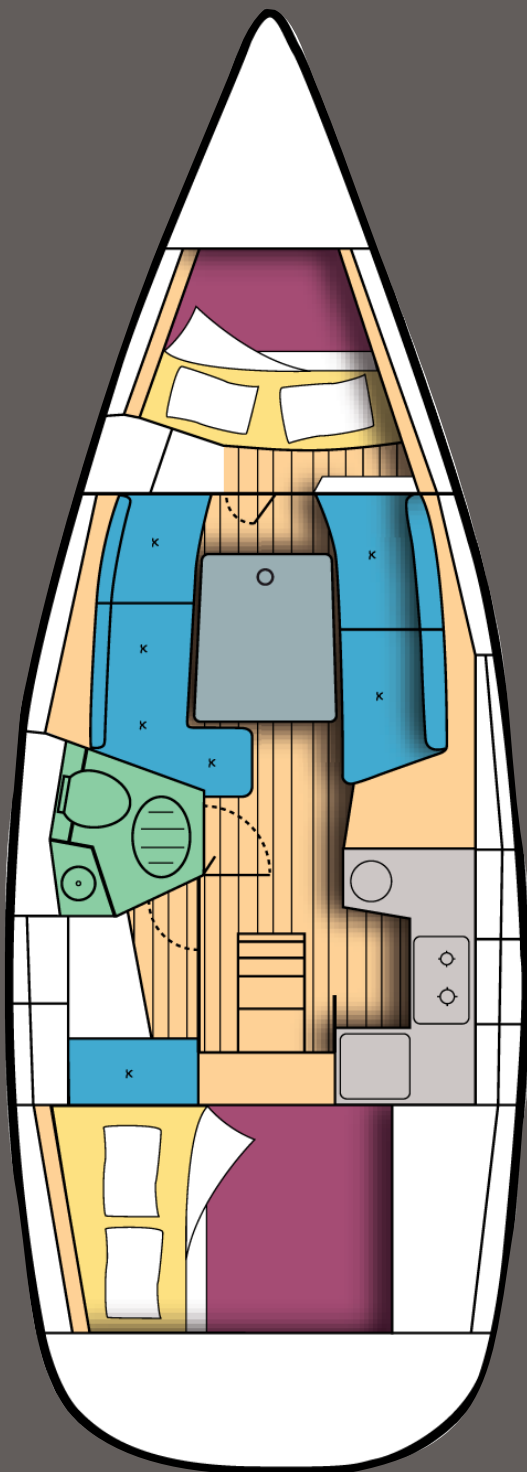

Principal Specifications

Length Overall	31ft 6in/9.60 m
Waterline Length	27 ft 11in/8.52 m
Beam	10ft 10 in/3.30 m
Draft	4 ft 11 in/1.5 m
Sail Area	541 sq ft/50.3sq m
Auxiliary Power	20 HP
Fuel Capacity	18 gal/70 L
Water Capacity	45 gal/170 L
Berths	4 + 2 in saloon
Heads	1
Showers	2